



T-Max Hospital Autoclaves

For CSSDs, OR and Medical Centers

 T-Max Line


Tuttnauer
Your Sterilization & Infection Control Partners



Hospital Autoclaves

Tuttnauer hospital autoclaves ensure reliable sterile processing for Hospital CSSD, OR, and Medical Centers. The autoclave sterilizers are designed and manufactured in a state-of-the-art facility in compliance with strict international standards to ensure safe re-use of sterilized equipment.

Experience Since 1925


As a family owned business Tuttnauer has manufactured products for over 90 years that have developed a reputation for their quality, high performance and reliability, sophisticated features, and ability to satisfy customer expectations. Tuttnauer's sterilization & infection control products are trusted at over 350,000 installations worldwide including Hospitals, Clinics and Laboratories.

Exceptional Support Worldwide

Tuttnauer's staff provides expert pre-sales and after-sales support services to satisfy customer expectations. Our teams are made up of multi-cultural people who are able to comfortably work with customers around the world. Tuttnauer provides in-depth face-to-face training in many locations around the world to ensure that Tuttnauer technicians and engineers are experts in their ability to support each customer's technical service needs.

At Tuttnauer we highly value customer feedback which contributes to the continuous improvement of our products and support services.





Narrow Design for Limited Space

A narrow design autoclave is as wide as 99cm and can sterilize a fully loaded chamber with 4 to 12 STU. Facilities with space layout limitations will benefit from narrow design autoclaves which provide high capacity in a limited space. Narrow design autoclaves allow for more autoclaves in a given space to ensure continued sterile processing in case of autoclave downtime.



Uniform Heat Distribution

Fully jacketed chambers ensure uniform heat distribution to ensure consistent serialization conditions for all loads in chamber. A chamber that is not fully jacketed may have cool spots which can cause improper sterilization.



Green Water Saving

The optional **EcoWater Radiator** and **EcoWater Chiller** water saving systems are the best solutions to minimize water consumption between 50% and 90%.



Perfectly Optimized Cycles

With years of research and customer feedback we have fine-tuned our formula for perfectly optimized cycles with the precise combination of pulses, timing, temperature control, speed and drying.



Stainless Steel Piping

Stainless steel piping and connectors are used to avoid corrosion which is necessary to safeguard the integrity of the autoclave and prevent contamination of the sterilized loads (either as chemical or particulate contamination).



Load Traceability

The optional R.P.C.R software allows for tracing sterilized loads by barcode. All cycle records and associated barcodes are automatically recorded to a PC on your network. In addition, R.P.C.R allows for convenient access to cycle reports, including graphs and tables (in PDF format).

Advanced Control System for Your CSSD

Take advantage of Tuttnauer's sophisticated user-friendly control systems for repeatable high performance. Choose either Tuttnauer's sophisticated Bacsoft controller or the Allen-Bradley (AB 1400 PLC) controller.

Standard Features

- 7" Multi-color touch screen panel
- Keypad control panel on second door of two door autoclaves with Bacsoft controller
- Stores the last 200 cycles in built-in memory (Bacsoft)
- Multiple access levels and user passwords to control access/operation of the autoclave
- Diagnostic In/Out test (enables technician to check each system component separately)
- Sterilization Temperature range 105°C to 138°C

Load Tracing with Barcodes

When loading the autoclave a barcode reader can be used to scan the barcodes of each load. Once the cycle starts the barcode numbers will be printed together with cycle information.

Optional Features

- 10" Multi-color touch screen
- 21 CFR part 11
- Independent Recording for cross-checking cycle measurements
- Disinfection/Isothermal Temperature range from 70°C to 95°C

Process Workflow Management Data Connection

Provides real-time data to any process workflow management system supporting Modbus



Sophisticated Touch Screen HMI

The HMI (Human Machine Interface) has been designed with the following considerations:

- Multi-color display for easier reading from a distance
- Multilingual (26 languages)
- Graphical display of Temperature and Pressure trend graphs



Cycle Programs

T-Max autoclaves are preprogrammed with 8 perfectly optimized cycle programs that cover the processing needs of most CSSDs and Operating Rooms.

8 Preset Cycle Programs

- Unwrapped cycle for operating rooms (OR) that need surgery instruments for immediate use
- Wrapped and double wrapped loads for CSSD processing on instruments and textiles at 134°C and 121°C for delicate instruments
- Additional special program cycles for prion applications and special wrapping materials

2 Test Cycles

- Bowie Dick/Helix for steam penetration testing
- Leak test to check vacuum integrity


Custom Cycles

- 20 cycles available for customized cycle programs

Allen-Bradley Control System

Optional Allen-Bradley advanced control system based on MicroLogix 1400 PLC controller includes the features of Bacsoft. Allen-Bradley controller supports automatic recording of cycle information to USB memory device only. With R.P.C.R. The remote monitoring feature is not available.

Bacsoft Controller



STANDARD

OPTIONAL




Printer



Touch Screen Loading side




Remote Internet access for Technical Support (requires R.P.C.R, and local cellular router for Internet connection)




Barcode Reader



Touch Screen Unloading side



Independent Supervisory System



R.P.C.R software for access from remote PC on internal network



Chart Recorder

Load Tracing & Automatic Recording of Cycle Information to Your PC

R.P.C.R Software (optional)


Cycle Records You Can Rely On

- Automatic recording of cycle information to any PC on your network via Ethernet
- Convenient access to graphs and tables that are easy to understand
- Easily generate PDF reports
- No need to file printouts, saving you time

Load Traceability

Conveniently trace loads from a PC on your network with R.P.C.R software. When barcodes of loads are scanned before a cycle starts, the barcode information is reported together with the cycle records.

With R.P.C.R you can see: Graphs of the cycle data, Numeric cycle data, Cycle print-outs, Measured values table, Parameter table.

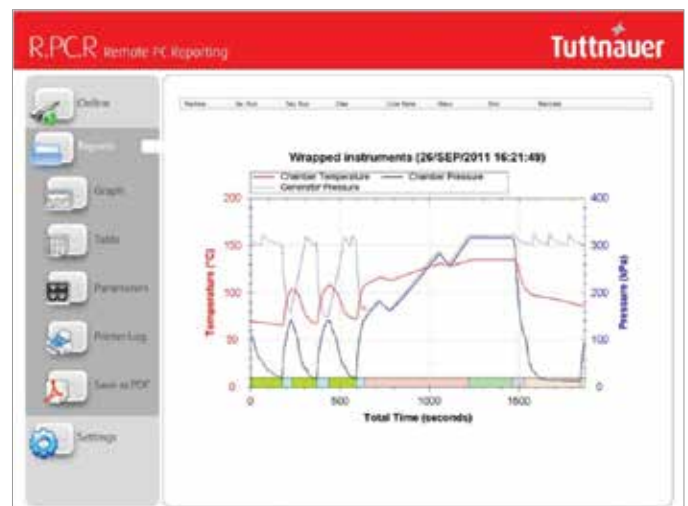

Wide Range of Models and Sizes

The T-Max line of autoclaves is designed to comply with the European EN285 standard with chambers designed for StU (Sterilization Unit) load volumes. Tuttnauer also builds customized configurations to adapt to a customer's site. All models are available with either single or double doors.



The T-Max Narrow Series

2 to 12 StU Capacity

T-Max Narrow Series Hospital Autoclaves have chamber volumes ranging in size from 175 Liters to 860 Liters (2 to 12 StU) and are available with fully automatic vertical sliding doors.



Model	Chamber Volume (Liter)	StU Capacity	Chamber Dimensions (WxHxD) mm
T-Max 2	175 Liter	2	360 x 710 x 705
T-Max 4	310 Liter	4	660 x 660 x 705
T-Max 6	430 Liter	6	660 x 660 x 990
T-Max 8	565 Liter	8	660 x 660 x 1295
T-Max 10	700 Liter	10	660 x 660 x 1620
T-Max 12L	860 Liter	12	660 x 660 x 1970

Model	EXTERNAL DIMENSIONS (mm)			
	Width 1 & 2 Doors	Height 1 & 2 Doors	Depth	
			1 Door	2 Doors
T-Max 2	1190	2040	1180	1010
T-Max 4	999	1980	1030	1050
T-Max 6	999	1980	1400	1310
T-Max 8	999	1980	1690	1610
T-Max 10	999	1980	2170	2010
T-Max 12L	999	1980	2400	2340



Vertical Sliding Door

T-Max Large Capacity Series

9 to 15 StU Capacity

T-Max Large Capacity Series Hospital Autoclaves have chamber volumes ranging in size from 800 Liters to 1300 Liters (9 to 15 StU) and are available with a fully automatic horizontal sliding door.



Horizontal Sliding Door

Model	Chamber Dimensions (WxHxD) mm	StU Capacity	Chamber Volume (Liter)
T-Max 9	660 x 1220 x 990	9	800 Liter
T-Max 12	660 x 1220 x 1295	12	1040 Liter
T-Max 15	660 x 1220 x 1620	15	1300 Liter

Model	EXTERNAL DIMENSIONS (mm)			
	Width	Height	Depth	
			1 & 2 Doors	1 Door
T-Max 9	2300	2017	1550	1540
T-Max 12	2300	2017	1650	1840
T-Max 15	2300	2017	2070	2170


Dimensions may change to meet facility layout requirements.

Turbo Autoclaves

Turbo autoclaves are equipped with stronger high performance systems to accelerate cycle process times.

Get more capacity for your limited space

Turbo Autoclaves reduce cycle times up to **36%** providing you a high performance capacity-to-space ratio per autoclave. For sterile processing facilities with limited floor space the Turbo models increase capacity without requiring extra space.

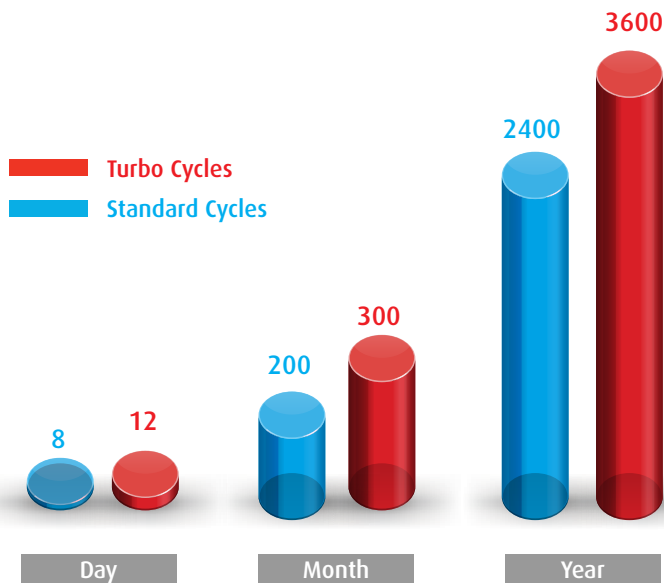

Speed up supply to OR

The time required to sterilize loads in a Turbo autoclave is much shorter, reducing turnaround time, thereby allowing for sterilized equipment to be available for re-use sooner.



Get Turbo sterilization in OR

Due to short sterilization cycles turbo autoclaves reduce Operating Rooms (OR) dependency on a CSSD by making sterilized equipment available sooner in the place where it is needed.



Green EcoWater Systems

Save Water & the Environment

Water Saving

Hospital autoclaves traditionally consume significant amounts of water using utility resources and increasing operational cost. Customers are increasingly looking for eco-friendly green features. Tuttnauer's water saving system will make your facility more environmentally-friendly and cost-efficient by saving hundreds of liters of water per cycle.


Most water consumption of an autoclave takes place during effluent cooling via a heat exchanger and during vacuum-pump cooling when generating a vacuum in the chamber.

Tuttnauer's water saving systems reduce the water usage during effluent cooling and vacuum generation thereby making efficient use of water.



EcoWater-Radiator


The EcoWater-Radiator reduces tap water consumption by as much as **50%**.

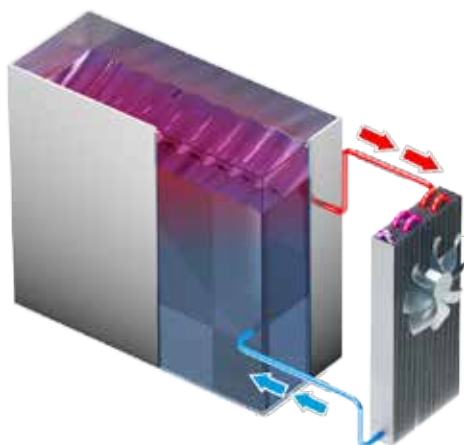

A powerful radiator system cools and re-circulates water used in the autoclave

EcoWater-Chiller

The EcoWater-Chiller is the best solution to minimize water consumption by as much as **90%** and is suitable for facilities with a chilled water supply.

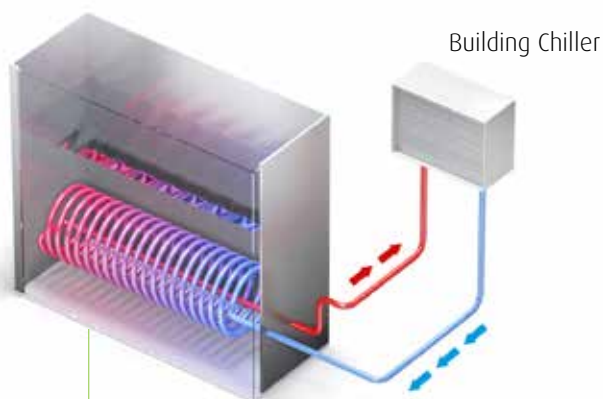

Tap water in reservoir is cooled by a cooling coil through which chilled water is passed. The tap water is circulated for re-use in the autoclave.

Loading Equipment

High quality stainless steel loading equipment for loading and unloading.

- **Pull Out Trays**

Stainless steel trays equipped with rails for easy loading and unloading. The rails are designed to prevent the trays from rolling over.

- **Loading Carts and Transfer Carriages**

The 316L loading carts are designed to roll from the transfer carriage onto the chamber rails for easy handling of heavy loads. To ensure safety and ease-of-use the carriage is equipped with a lock preventing sliding of the cart. Swivel wheels with wheel breaks maximize mobility in limited space.

- **Automatic Loading**

Autoclave is designed to connect with automated loading and unloading systems, which are controlled via the autoclave controller.



Complimentary Products

Ultrasonic Cleaner

Deep cleaning of hollows before sterilization



Sealing Machine

For sealing instruments in pouches for sterile storage



Reverse Osmosis Water System

For demineralized water supply to sterilizer



Safety

Safety for personnel, autoclave and load are priority in the design, construction and operation of any Tuttnauer autoclave. Tuttnauer is committed to the highest industry safety standards and directives to ensure safety not only for your employees operating the autoclaves but also for your sterile processing facility and the loads being sterilized.

Tuttnauer autoclaves are provided with redundant independent monitoring systems and audiovisual alarms to notify operators of any issue that requires attention. An emergency stop button on the loading side of the autoclave may be used to safely stop the autoclave cycle.

Standards

Directives, Guidelines & Technical Standards

- EN 285: 2006+A2: 2009 Large Steam Sterilizer
- 2002/96/EC WEEE and 2002/95/EC RoHS
- 2004/108/EC - Electromagnetic compatibility
- 2006/95/EC - Electrical equipment
- 2006/42/EC Machinery Directive
- 93/42/EEC for medical devices (amended in Directive 2007/47/EEC)
- EN 17665-1: 2006 Sterilization of health care products – moist heat
- ANSI / AAMI – ST 8: 2008 Hospital steam sterilizers

Safety and EMC Standards

- IEC 61010-1: 2010 Safety Requirements for measurement control and laboratory use
- IEC 61010-2-40: 2005 Safety requirements for sterilizers used to treat medical materials
- EN 61326-1: 2006 Electrical Equipment for EMC requirements
- EN 60529:1991 Degrees of protection provided by enclosures (IPX4)

Pressure Vessel and Steam Generator Construction Standards

- PED 97/23/EC - Pressure Equipment Directive
- ASME Code, Section VIII, Division 1, unfired pressure vessels
- ASME Code, Section I, for boilers

Tuttnauer pressure vessels are both ASME and PED certified. All ASME certified vessels are inspected by an independent authorized ASME inspector.

Quality System Compliance

- ISO 9001:2008 - Quality Management Systems
- EN ISO 13485:2012 Quality Management System – Medical Devices
- In compliance with FDA QSR 21 CFR part 820 & part 11
- Canadian MDR (CMDR) SOR/98-282 (2011), consolidated



Learn from our Experts

Join our blog www.tuttnauer.com/blog



Hospital Sterilizers

International Sales and Marketing
E-mail: info@tuttnauer.com
www.tuttnauer.com

Tuttnauer Europe b.v.
Hoeksteen 11, 4815 PR
P.O.B. 7191, 4800 GD Breda
The Netherlands
Tel: +31 (0) 765 423 510 Fax: +31 (0) 765 423 540
E-mail: info@tuttnauer.nl

Tuttnauer USA Co.
25 Power Drive,
Hauppauge, NY 11788
Tel: +800 624 5836, +631 737 4850 Fax: +631 737 0720
E-mail: info@tuttnauerUSA.com


Tuttnauer
Your Sterilization & Infection Control Partners

Distributed by: